


# Product Overview

## Motor Driven Reels





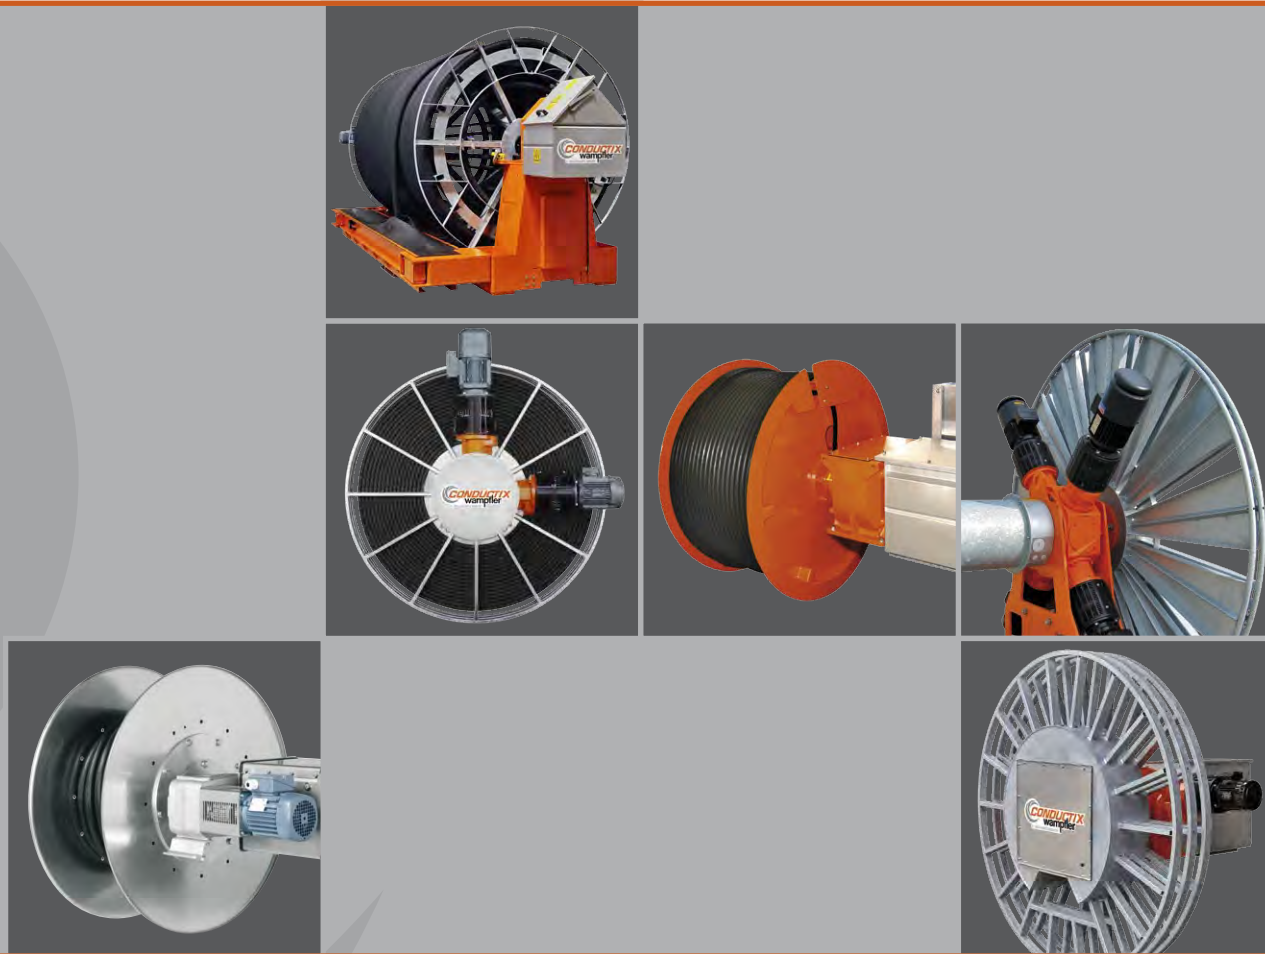





# An All Around Solution for Cable and Hose Management

Where goods and people are in motion, you will find custom-engineered Motor Driven Reels designed and built by Conductix-Wampfler. If you need to manage critical power cables, data cables, air hoses, or fluid hoses, we have the ideal solutions!

Our many years of experience in developing and manufacturing motorized reeling systems have resulted in a sophisticated and highly developed product line.

For the management of low voltage and high voltage cables or hoses, Conductix-Wampfler Motor Driven Reels cater to all kinds of applications.

Reliability cannot be compromised.  
Conductix-Wampfler reels safely  
handle cables for critical applications.



At container and bulk ports, steel mills, theaters, waste water treatment plants, and mines, Conductix-Wampfler motorized reels reliably handle demanding requirements, even in harsh environmental conditions.

Installation on-site can be completed quickly and periodic maintenance is fast and easy. During their lifetime, Conductix-Wampfler Motor Driven Reels will minimize your total cost of ownership.

Conductix-Wampfler offers a complete package of services to our customers. In addition to the delivery of the motorized reel, we offer qualified project consulting, complete system engineering services, selection of the right cable, and a full array of accessories.

Management of project logistics and on-site commissioning are important services we provide for our customers.

Thus, energy and data signals reach your machinery safely and reliably, wherever they are required.

Conductix-Wampfler provides service before and after the sale from our global network of sales offices. We support you - worldwide!



24/7 operation in demanding environments  
such as bulk material handling


Everything from one source!  
The right cable is always recommended.



# Component Description


## Motor Driven Reel

- ❶ Cable or hose
- ❷ Spool
- ❸ Gearbox
- ❹ Drive unit
- ❺ Rotary Joint in housing
- ❻ Limit switch
- ❼ Roller Guides
- ❽ Cable Guide

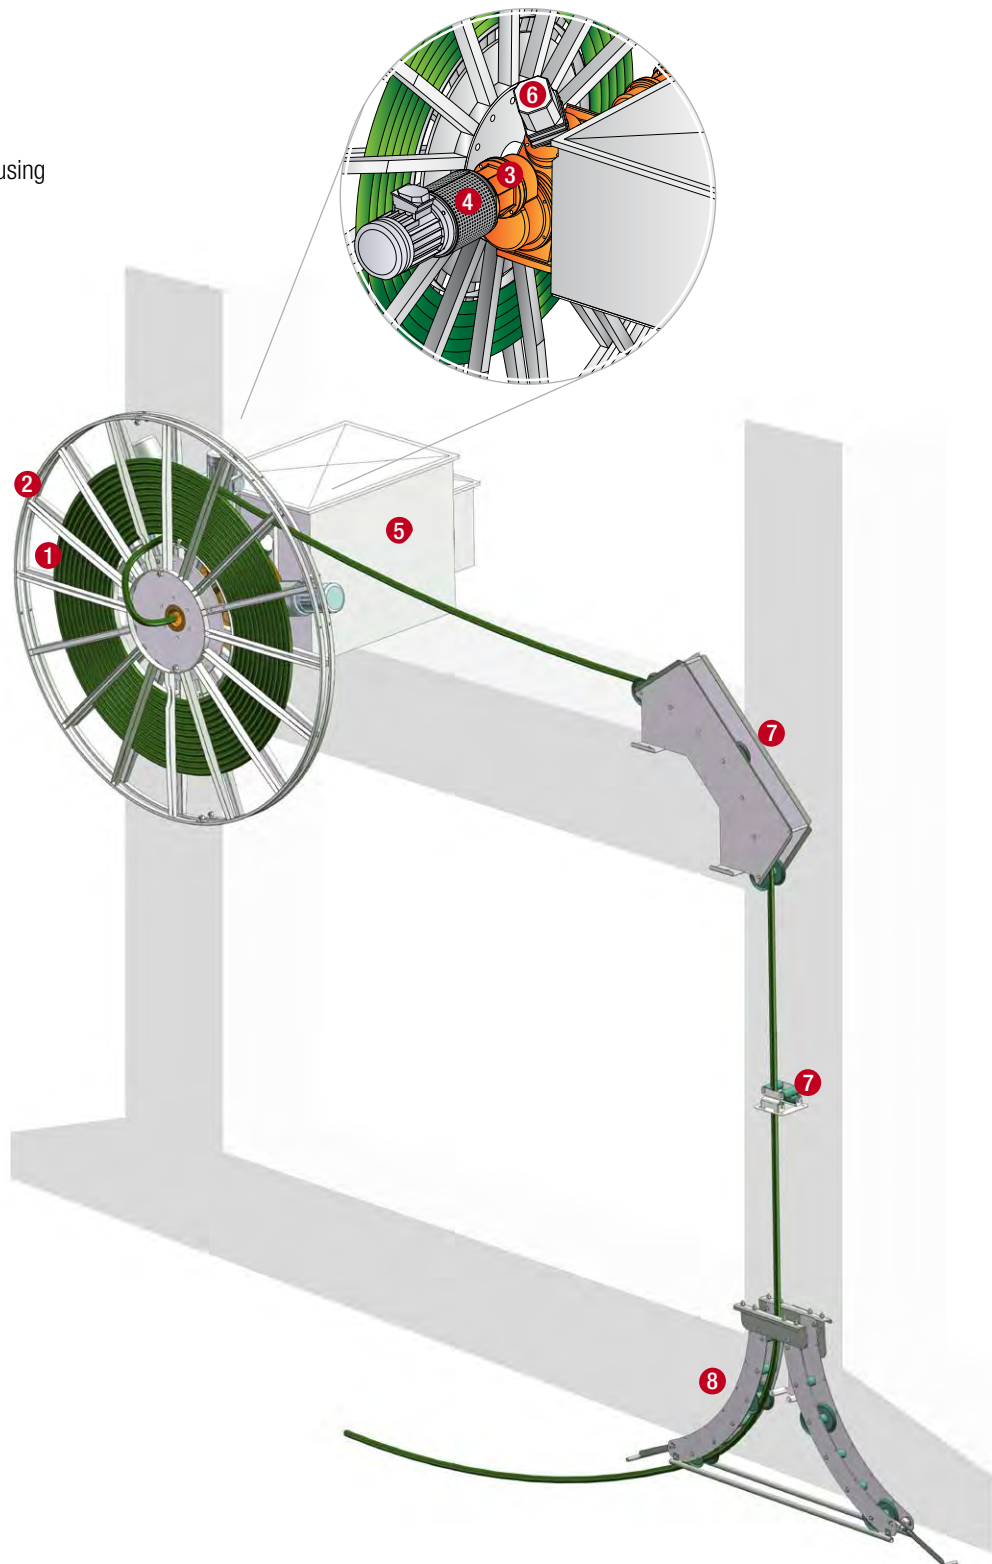

## Typical Reel Parameters

## What are your requirements?

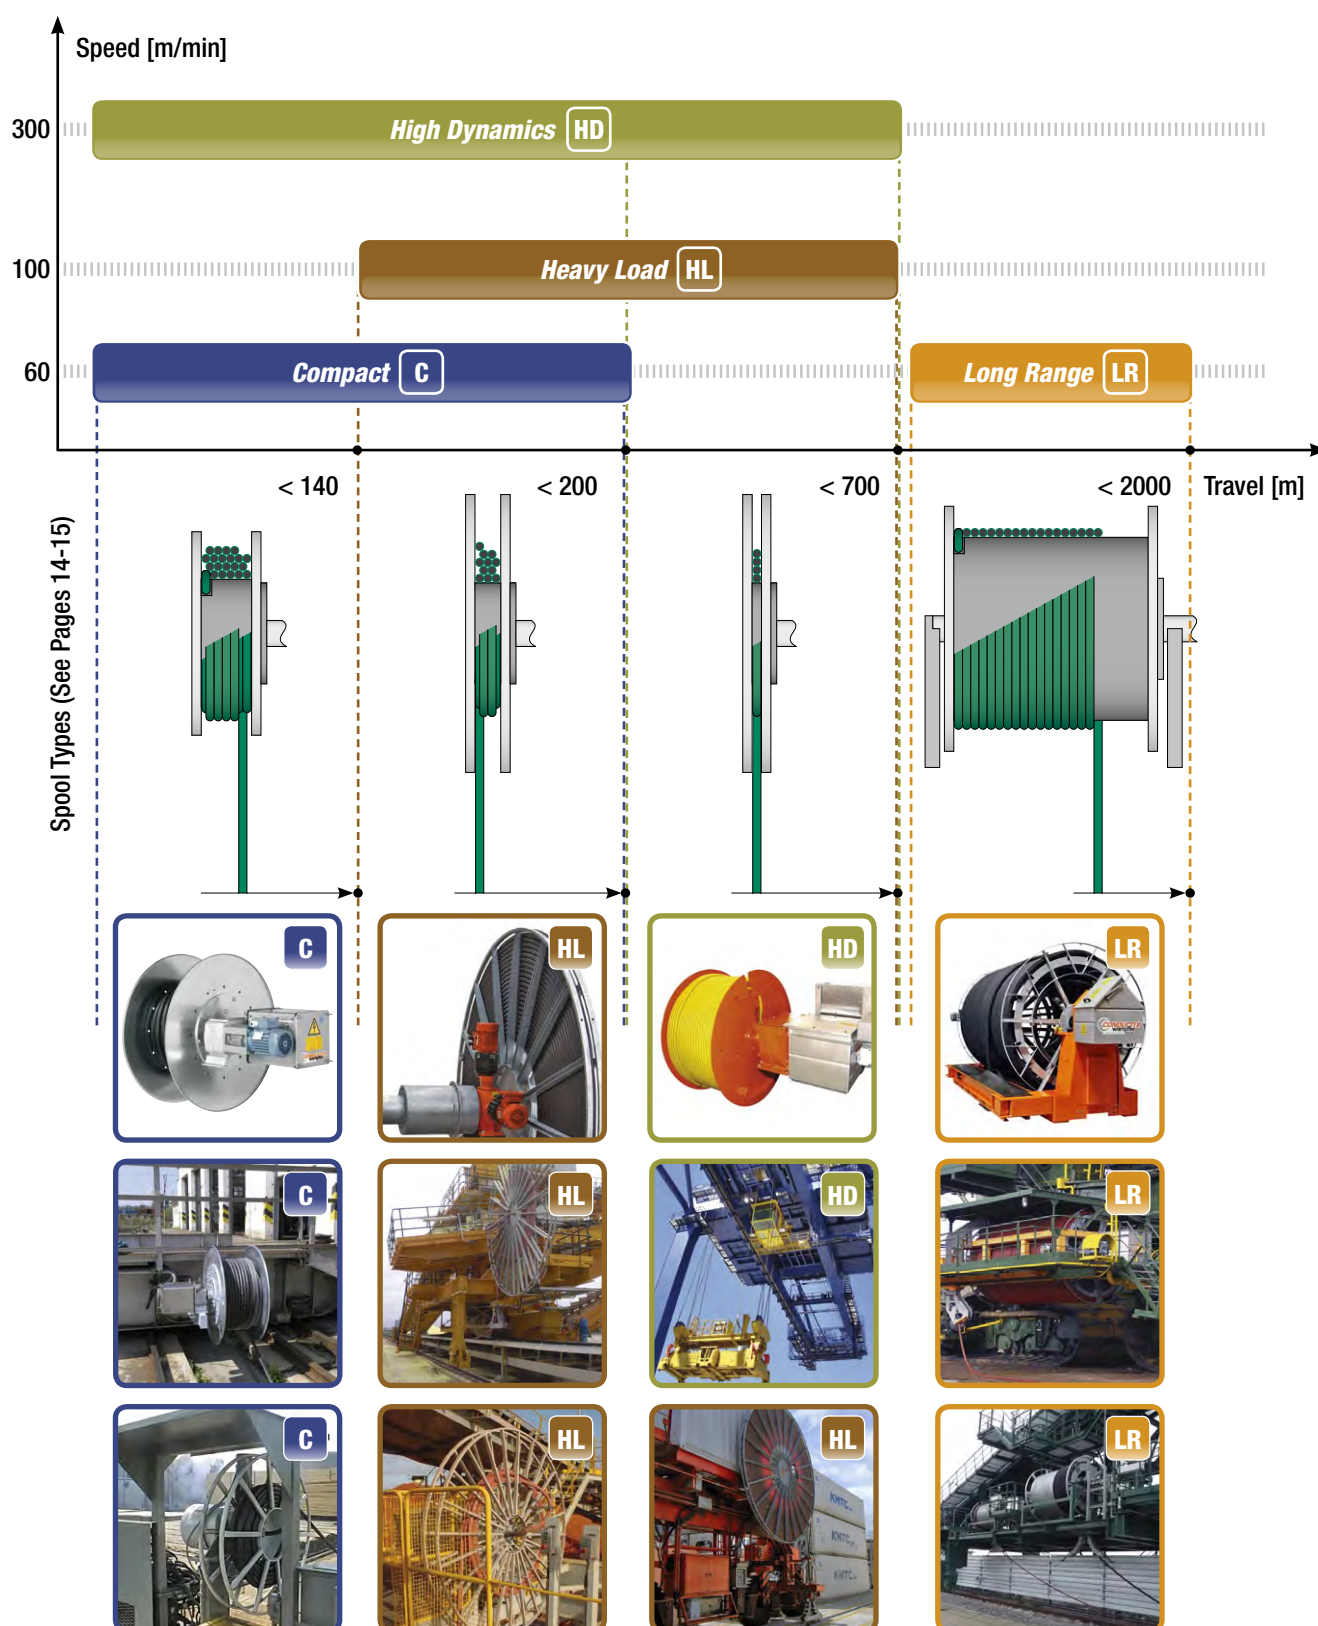







# Series **C** | Compact

## Typical applications

- Gantry cranes
- Overhead cranes
- Grabs or magnets
- Transfer cars
- Waste water treatment facilities
- Theater stage rigging



## Optimal corrosion protection

even in tough environments.

Flanges and reel drum are manufactured from hot dip galvanized steel.



## Reliable operation

with standardized slip ring assembly.

**Highly durable**, maintenance-free and contactless torque transmission - standard motor with magnetic coupler.

## Specifications

Travel speed	Up to 100 m/min
Winding length	200 m max
OD of spool	Random wind spool: 400 mm - 1,700 mm Monospiral spool or 3-2-3 spool: 1,100 mm - 3,600 mm
Gearbox	Type W: 100 Nm - 400 Nm Type BNA: 300 Nm - 700 Nm
Slip ring assembly <small>(Also available with rotary joint for hose installation)</small>	Power max: 690 V – 200 A Control & Data max: 500V / 690 V - mA – 25 A
Temperature range	-20 °C - +60 °C










# Series **HL** | *Heavy Load*

## Typical applications

- Ship-to-shore (STS) cranes
- Rail mounted gantry (RMG) cranes
- Ship unloaders
- Stackers / reclaimers
- Shipbuilding cranes

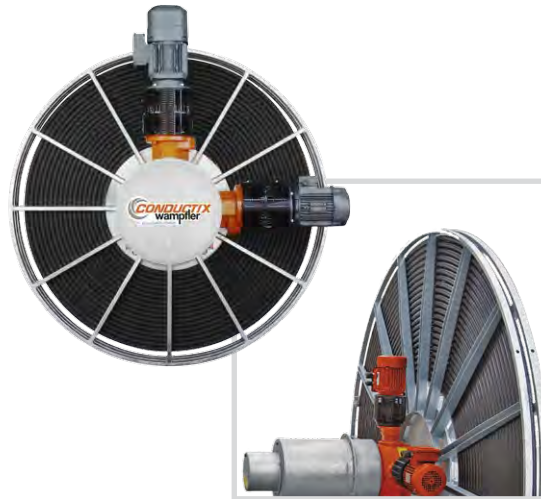

## Modular assembly system

The cable reel can be upgraded after installation by adding drive units.

## Magnetic Coupler Drive (MAG Drive) or Variable Frequency Drive (SMART Drive)

## 5 year or 15,000 hour operation before any maintenance is required

Gearboxes are grease-lubricated from the factory.


## Optimal corrosion protection to handle aggressive environments

Flanges and reel drum are manufactured from hot dip galvanized steel or stainless steel.


## Specifications

Travel speed	AC motor with magnetic coupler (MAG drive): up to 100 m/min Variable frequency controlled motor (SMART Drive): up to 180 m/min
Winding length	700 m max
OD of spool	Monospiral spool or 3-2-3 spool*: 1,100 mm - 8,000 mm
Gearbox	Type BNA: 1,100 Nm - 19,000 Nm Type X07: 1,100 Nm - 11,000 Nm
Slip ring assembly <small>(Also available with rotary joint for hose installation)</small>	Power low voltage max: 690 V - 1,600 A Power high voltage max: 24,000 V - 500 A Control max: 500 V - 25 A Data: fiber optic, mA
Temperature range	-40 °C - +60 °C

\* See page 14 for further description of a 3-2-3 spool










# Series **HD** | *High Dynamics*

## Typical applications

- Spreader reels
- Ship-to-shore (STS) cranes
- Automated stacking cranes
- Rail mounted gantry (RMG) cranes
- Electric rubber tyred gantry (E-RTG) cranes
- Intermodal cranes

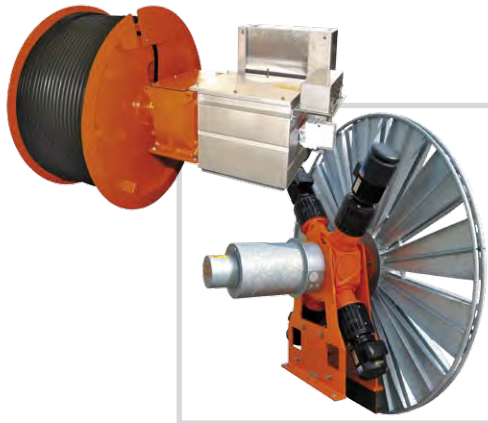

**Sophisticated speed and torque control**  
are ideal for machines with highly dynamic operation.

**Highly efficient components**  
and low starting inertia.

**Smooth handling of cable**  
increases cable lifetime and overall system reliability.

**Optimal corrosion protection even under aggressive conditions**  
Flanges and reel drum are manufactured from hot dip galvanized steel or stainless steel.

## Specifications

Travel speed	AC motor with magnetic coupler (MAG drive): up to 180 m/min Variable frequency controlled motor (SMART Drive): up to 300 m/min
Winding length	700 m max
OD of spool	Monospiral spool: 1,100 mm - 8,000 mm Single layer drum for spreader reels: 1,200 mm
Gearbox	BNA / A3X: 1,100 Nm - 11,000 Nm NCR: 2,500 Nm - 11,000 Nm
Slip ring assembly	Power low voltage max: 690 V - 1600 A Power high voltage max: 24,000 V - 500 A Control max: 500 V - 25 A Data: fiber optic, mA
Temperature range	-40 °C - +60 °C









# Series **LR** | Long Range

## Typical applications

- Stackers / reclaimers
- Bucket wheel excavators
- Tripper cars
- Mobile conveyors
- Scrapers
- Stack rakes



## Extra long travel distance

Single or multi-layer drum type spool.

## Skeleton-type drum

for optimal cable cooling and reduced inertia.

## Modular platform construction


allows multiple arrangements and best fit with machine structure.

## Rugged construction

for harsh environments.

## Specifications

Travel speed	Up to 60 m/min
Winding length	2,000 m max
OD of drum	Up to 3.3 m
Gearbox	BNA: 1,000 Nm - 18,000 Nm SMART Drive: 1,000 Nm - 8,500 Nm
Slip ring assembly <small>(Also available with rotary joint for hose installation)</small>	Power low voltage max: 690 V - 1,600 A Power high voltage max: 36,000 V - 500 A Control max: 500 V - 25 A Data: fiber optic, mA
Temperature range	-40 °C - +60 °C






# Spools

The spool is one of the most critical components of a motor driven reel system. Choosing the ideal spool will optimize performance and maximize the life of the cable. The right spool can provide long maintenance cycles and avoid downtime.

With either a standard or a customized solution, Conductix-Wampfler is always able to provide the best type of spool for your application.


## • Random Wind Spools



The **Random Wind Spool** is particularly suited for short or medium lengths of cable or hose.

During winding, the cable is naturally distributed around the drum without any cable guide system.

## • 3-2-3 Spools



**3-2-3 Spools** are a combination of Monospiral and Random Wind Spools, where the cable is stacked in layers, each three cable diameters wide.

The 3-2-3 spool is generally used when space available for the spool is limited.




**Double Monospiral Spool**, with two identical cables with large cross-sections.





Level Wind Spool  
with power cable on  
a stacker / reclaimer

### • Monospiral Spools




The **Monospiral Spool** wraps the cable in the same plane and prevents the cable from twisting. It is your guarantee of a longer cable life.

Monospiral Spools offer maximum exposure to ambient air and best cooling of the cable.

The largest Monospiral Spools can accommodate up to 700 meters of cable.


### • Level Wind Spool

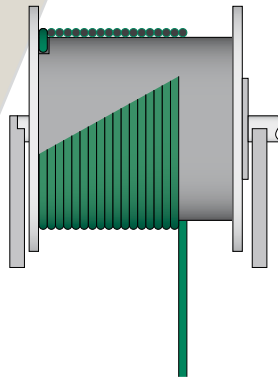

**Level Wind Spools** are designed to accommodate cables that are 1,000 meters or longer.

The cable is wound in one, two, or three layers on a cylindrical drum. The cable is layered with a guide system driven by the reel drum.

### • Special Spools

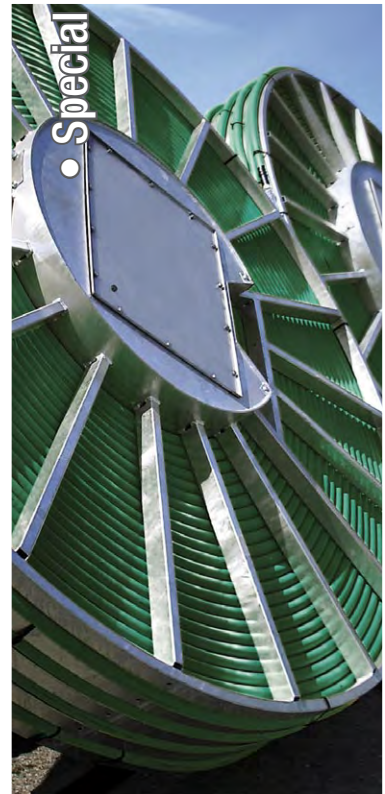

By request, Conductix-Wampfler can build **Special Spools** such as:

- Double monospiral spools
- Plain monospiral spools
- Spools with alternate materials such as stainless steel
- Spools with special protection and/or dimensions
- Spools with reinforced construction for harsh applications.



## Gearbox Units

The gearbox unit supports all reel components and matches the rotational speed and torque to the application.

### Conductix-Wampfler gearboxes for compact applications: Type W

This compact gearbox unit is easy to install and can handle low to medium torque requirements. The W-gearbox is available in three different sizes.



Type W gearboxes provide torque values from 100 Nm up to 800 Nm and each is mounted inside a corrosion resistant aluminum housing. The drive unit and slip ring assembly are parallel to the hollow shaft, allowing compact dimensions.

### Conductix Wampfler gearboxes for heavy loads: Types BNA and X07

These bevel gear units are designed for medium to high torque requirements and demanding conditions, and provide maximum service.



BNA and X07 gearboxes provide torque values from 1,100 Nm up to 19,000 Nm. The high dimensional stability of the cast iron housing provides long operational life even when subjected to high mechanical and dynamic stress. Gearboxes are lubricated for a 5-year life span or 15,000 operating hours.

### Conductix-Wampfler highly dynamic gearboxes: Type NCR

Designed for today's fastest and most dynamic applications that have high torque requirements and extreme dynamic stresses.



Type NCR gearboxes provide torque from 1,100 Nm up to 11,000 Nm. The robust spur gear design withstands abrupt speed changes and load variations while transferring the high power required.





# Rotary Joints



## Rotary Joint (for hose reels)

For the transfer of air, gases, or fluids, motorized reels can be equipped with a single or multi-channel rotary joint.

- Available pipe thread diameters:  
 $\frac{3}{8}$ " -  $\frac{1}{2}$ " -  $\frac{3}{4}$ " - 1" -  $1\frac{1}{4}$ " -  $1\frac{1}{2}$ " - 2" -  $2\frac{1}{2}$ " - 3"
- The rotary joints have a standard Kanigen® (electroless nickel) plating.



Rotary joint  
for hose reel

## Conductix-Wampfler Motor Driven Reels

## Slip Ring Assemblies



Conductix-Wampfler has decades of experience in the design and manufacture of slip ring assemblies.

Our slip ring assemblies comply with IEC, UL, NEMA, and VDE international standards among others. Conductix-Wampfler slip ring assemblies are designed for the following applications:

### Power

- Low voltage up to 690 V and 1250 A
- High voltage up to 36,000 V and 500 A
- 100% duty cycle

### Control

- Low voltage up to 500 V and 24 A
- Data transmission from controls and measurement devices, as well as from, computer, audio-video, and telecom equipment.
- 100% duty cycle

### Mixed Construction

- Mixed power and control slip ring assemblies
- Rings of the same or different diameters on the same assembly

## Fiber Optic Transmitter (TF0)



Conductix-Wampfler was one of the first cable reel manufacturers to develop a fiber optic transmitter that could meet industrial requirements.


Fiber optic cables are ideal for transmitting large amounts of information over long distances.

- Optic fibers:  
 single-mode (9/125) or  
 multi-mode (50/125 and 62.5/125)
- Attenuation:  
 single-mode: < 1.5 dB  
 multi-mode: < 1.0 dB
- Available in models that provide  
 40, 80, or 120 turns  
 and 6, 12, 18, or 24 fibers
- Standard connectors are type ST  
 (types FC, SC and others available  
 by request)



## Drive Units | MAG Drive

Standard motor with magnetic coupler

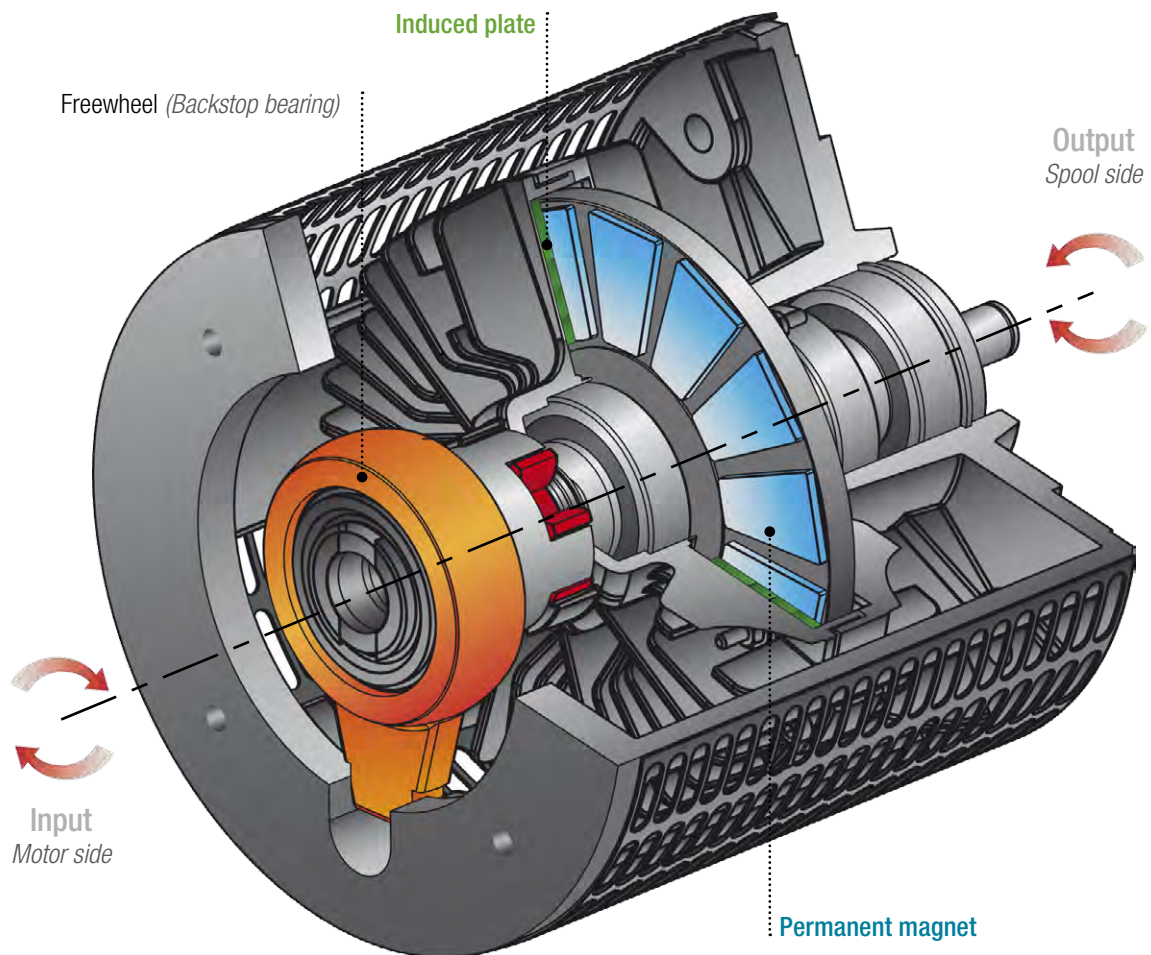

### Advantages of the magnetic coupler drive

- High efficiency and low energy consumption
- Smooth constant torque to ensure maximum cable life
- No contact: no friction, no lubrication required
- No loss of cable tension during power failures
- Low inertia even when acceleration is high




### Environmental and Operating Considerations

- The magnetic coupler is a completely sealed component (IP66).
- Suitable for seacoast conditions and exposure to sea waves.
- Suitable for hazardous environments (spark-free).
- Will handle ambient temperatures from -40°C up to +70°C.
- Operates in any position.

### Assembly

Each magnetic coupler is assembled from the following parts:

- **The induced plate** consists of a hardened magnetic ring attached to a support housing with cooling fins.
- **The permanent magnet** contains eight blocks of ticonal magnets mounted with alternate polarity.

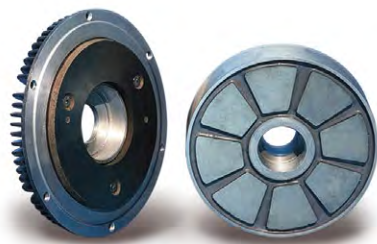

The permanent magnet magnetizes the induced plate, thus generating a ring of alternating polarity and the magnetic forces required to transmit the torque.

### Operating Principle

#### • Winding of cable

The induced plate rotates at the speed of the electric motor. The permanent magnet is then driven by the magnetic forces and the spool will wind the cable at a rate that matches the speed of the mobile machine.

#### • Unwinding of cable

The induced plate always turns in the winding direction at the output speed of the electric motor. The permanent magnet which is connected to the spool shaft rotates in the opposite direction.

*The electric motor always turns in the same direction regardless of the direction of the spool rotation.*

#### • Power off

When the equipment is switched off, the rotation of the induced plate is stopped using a backstop bearing. The magnetic field of the permanent magnet generates torque, which prevents the cable from unwinding.

However, it is always possible to unwind the cable by applying a pull action stronger than the magnetic coupler torque.


*Therefore, the cable (or hose) is protected even if the mobile machinery moves unintentionally (e.g. a quay side crane pushed by the wind).*



### Settings

The amount of output torque generated by the coupler depends on the air gap between the induced plate and the permanent magnet. A smaller gap generates more torque, a larger gap generates less torque.

The air gap is factory pre-set for the application. However, adjustments can easily be made on-site if there are changes to the travel speed, cable, or hose.

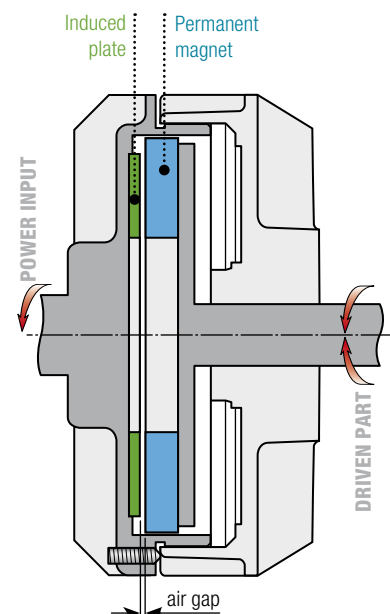







# Drive Units | SMART Drive



## Variable Frequency Drives (VFDs)

Variable Frequency Drives (VFDs) for motorized cable reels are specified when the energy supply system must accommodate highly dynamic horizontal or vertical movements.

**The advantages of a VFD** are in its ability to supply continuous torque control and reel motor speed regulation. Depending on the configuration of the complete system, a VFD controlled SMART Drive Reel can handle crane travel speeds up to 300 m/min and accelerations up to 0.6 m/s<sup>2</sup>.

During operation, sophisticated application software directs the VFD to deliver the just right amount of torque, thus preventing accelerated wear on the cable. Depending on the equipment and configuration used, a VFD-controlled reel will allow a gantry crane to smoothly pass over the center-feed point at speeds up to 150 m/min.

During the braking operation, some VFD systems even allow power recovery, depending on the brand of the control system used.

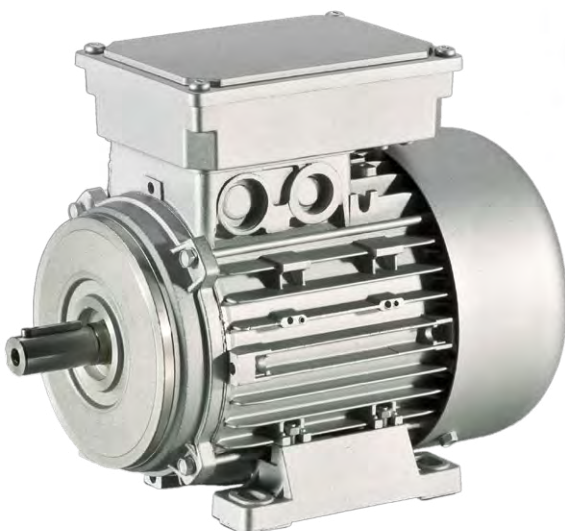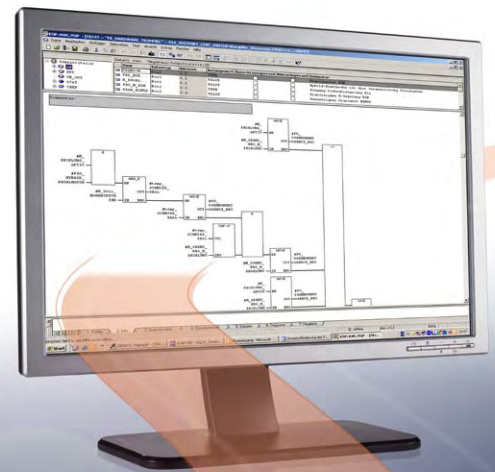

**The superior functionality of a variable frequency drive** is determined by the correct combination of motor and drive unit, but mainly by the control system.

### **Conductix-Wampfler provides the best solution for each application.**

We start with the delivery of hardware components and software packages for the integration into the crane main control. We then add the complete switching cabinet including parametrized converters and appropriate control software. We finish by performing the final on-site commissioning.

Control systems used for Conductix-Wampfler Motor Driven Reels communicate via the established bus system or, for simple applications, by relay contacts.

















# Cables

Specifying the right cable is a key part of the cable reel solution.

The correct cable influences cable reel performance and therefore the reliability of the complete system.

Conductix-Wampfler offers the most suitable cable for each application, operating speed, and environmental condition. We offer a complete range of cables from basic reeling cables to the highest premium quality cables to handle severe mechanical and dynamic demands.

Whether you need shielded or unshielded energy and control cables, data and bus cables, or fiber optic cables, Conductix-Wampfler has the right product for reeling applications!

Application															
	Basic Reeling Systems						Heavy Duty Reeling Systems								
Power / Control															
	MALT	GPM	RP	RG	WG	WGF	C800	GPM-RF	RXP	RXG	TRA	HVR	WXG	RXX	TRA-RF
Composite Power + Control + Data															
			RP-D	RG-D	WG-D	WGF-D			RXP-D	RXG-D		HVR-FO	WXG-D		
Design	CXW	CXW	12YRD11YH	NSHTOEJ-J	CXW	(N)TSFCEWOU	CXW	CXW	12YRD11YH	(N)SHTOEJ-J	CXW	CXW	(N)TSFCEWOU	(N)SHTOEJ-J	CXW
Outer jacket material	PVC	PUR	PUR	Rubber	Rubber	Rubber	PVC	PUR	PUR	Rubber	PUR	Rubber	Rubber	Rubber	PUR
Suitable for use outdoors	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Voltage range	0.6/1 kV	0.6/1 kV	up to 0.6/1 kV	0.6/1 kV	3.6/6 kV up to 12/20 kV	3.6/6 kV up to 12/20 kV	0.6/1 kV	0.6/1 kV	up to 0.6/1 kV	0.6/1 kV	0.6/1 kV	3.6/6 kV up to 12/20 kV	3.6/6 kV up to 12/20 kV	0.6/1 kV	0.6/1 kV
Tensile load capacity max. [N / mm <sup>2</sup> ]	10	12	15	15	20	15	15	20	25	30	30	20	20	30+	30+
Travel speed max. [m / min]	40	60	80	120	120	120	60	90	180	240	200	180	240	240	240
Temperature range flexing [°C]	-20	-25	-20	-25	-25	-25	-10	-25	-30	-35	-25	-30	-35	-35	-25
	up to 60	up to 60	up to 70	up to 80	up to 80	up to 80	up to 60	up to 60	up to 80	up to 60	up to 80	up to 80	up to 80	up to 80	up to 60

● ideal ● limited

# Reeling Cable Features

- Reduced diameter and weight by using ideal insulation and sheathing materials.
- Better resistance to corkscrewing\* due to reverse twist stranding.
- Stable construction and geometry due to the use of extruded fillers.
- Highly wear resistant outer sheath, even in aggressive environments.
- Extremely high resilience due to very short-lay stranding.

- High axial rigidity by means of interlinked inner and outer sheaths.
- All power cables are produced with left-hand lay.

## Special Cables (available by request)

- Composite cables with power + control + fiber optics.
- Cables with compounds designed for temperatures down to -50°C.

- Cables built to withstand temperatures up to 180°C.
- Cables made to withstand especially demanding environments, water, waste waters, oil, and more.



# Custom Cables

For unusual applications or environments, we can design a custom cable that meets your specific requirements. Contact us!

\* Cables not designed for demanding reeling applications can become "corkscrewed" - that is, the internal conductors can become damaged.





# Accessories

Conductix-Wampfler offers a complete range of accessories for motorized reels...

- ① One-way or two-way cable guides with optional slack-cable, over-pull, and position detectors
- ② Cable entries and anchor drums
- ③ Connection boxes for power, control, and optic fiber
- ④ End limit switches
- ⑤ Guiding and diverting devices
- ⑥ Cable sleeves with shock absorber springs
- ⑦ Strip heaters to reduce condensation in slip ring housings (not shown)


Many more accessories are available; contact us for details.

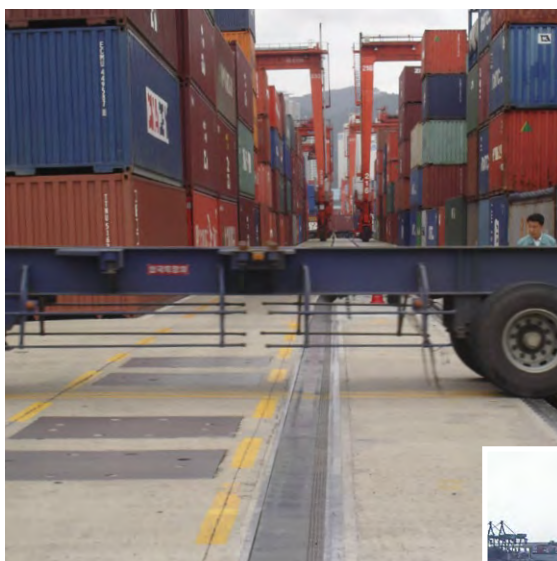

## Trenchguard® Cable Protection System

The system includes:

- Galvanized or stainless steel pre-manufactured trench channel
- Reinforced flexible rubber belt
- Stainless steel mounting hardware
- Belt lifting rollers mounted on the cable guide






## Application engineering

With decades of experience designing and engineering for specific applications, Conductix-Wampfler is uniquely capable of meeting the demands and requirements of your industry or environment.

Hazardous locations (ATEX), nuclear radiation, chemically aggressive environments, extreme climatic conditions, or saline air conditions are all available as optional protection packages.

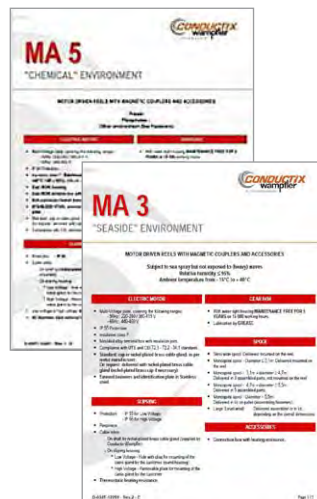

## ReelQuote

ReelQuote is a powerful software package for technical analysis of projects and selection of the best reeling solution. The program provides access to hundreds of optional features or application specific designs.

With ReelQuote, we guarantee you will get the best reel system for your application.







## Customized Services

The scope and depth of the Conductix-Wampfler service range are based on the requests and requirements of our customers.

We can handle anything from project planning to long-term service agreements. For maximum operational life and the continued safety of complex systems, you should consider using our experienced service team.

### At the planning stage we:

- Define the application parameters
- Select the most suitable motorized reel system and cable or hose
- Optimize the whole system to your requirements, application parameters, and environmental factors

### At the pre-assembly stage we:

- Assemble the reel system
- Install the cable and connect the slip ring assembly
- Pre-adjust the parameters of the variable frequency drive units

### At the final assembly and inspection stage we:

- Determine any additional assembly that needs to be performed on-site
- Complete the installation and commissioning using highly trained and experienced personnel
- Perform the final inspection
- Train and debrief the customers' personnel on-site

### Maintenance and service

- Regular maintenance and inspections increase the operational life of the installation and ensure long-term performance and availability
- A Conductix-Wampfler service agreement is your "Worry Free Package"!



The experts at Conductix-Wampfler assist customers from planning through pre-assembly right up to the on-site installation - anywhere in the world



# Your Applications – our Solutions

Motor Driven Reels from Conductix-Wampfler represent only one of the many solutions made possible by the broad spectrum of Conductix-Wampfler components for the transport of energy, data, gases, and fluids. The solutions we deliver for your applications are based on your specific requirements. In many cases, a combination of several different Conductix-Wampfler systems can prove advantageous. You can count on all of Conductix-Wampfler's Business Units for hands-on engineering support - coupled with the perfect solution to meet your energy management and control needs.



## Cable reels

Motor Driven Reels and spring reels by Conductix-Wampfler hold their own wherever energy, data and media have to cover the most diverse distances within a short amount of time - in all directions, fast and safe.



## Festoon systems

It's hard to imagine Conductix-Wampfler cable trolleys not being used in virtually every industrial application. They're reliable and robust and available in an enormous variety of dimensions and designs.



## Conductor rails

Whether they're enclosed conductor rails or expandable single-pole systems, the proven conductor rails by Conductix-Wampfler reliably move people and material.



## Non-insulated conductor rails

Extremely robust, non-insulated conductor rails with copper heads or stainless steel surfaces provide the ideal basis for rough applications, for example in steel mills or shipyards.



## Energy guiding chains

The "Jack of all trades" when it comes to transferring energy, data, air and fluid hoses. With their wide range, these energy guiding chains are the ideal solution for many industrial applications.



## Slip ring assemblies

Whenever things are really "moving in circles", the proven slip ring assemblies by Conductix-Wampfler ensure the flawless transfer of energy and data. Here, everything revolves around flexibility and reliability!



## Inductive Power Transfer IPT®

The no-contact system for transferring energy and data. For all tasks that depend on high speeds and absolute resistance to wear.



## Reels, retractors and balancers

Whether for hoses or cables, as classical reels or high-precision positioning aids for tools, our range of reels and spring balancers take the load off your shoulders.



## Jib boom

Complete with tool transporters, reels, or an entire media supply system - here, safety and flexibility are key to the completion of difficult tasks.



## Conveyor systems

Whether manual, semiautomatic or with Power & Free – flexibility is achieved with full customization concerning layout and location.



# www.conductix.com

**Conductix-Wampfler** has just one critical mission:

To provide you with energy and data transmission systems  
that will keep your operations up and running 24/7/365.

**Distributor:** BestOF Kft. 1029 Budapest, Arany János utca 9/B.

[www.BestOFKft.com](http://www.BestOFKft.com)

[info@bestofkft.com](mailto:info@bestofkft.com)

Tel: +36 1 200 2822, +36 1 391 6990 Fax: +36 1 398 7340

